


Uppseting av HUAWEI B593 3G/LTE Modem

Huawei B593 3G/TLE Modem má uppsetast, fyri at kunna knýta seg i Føroya Tele 3G Netíð. Við at fylgja hesi vegleiðing, verður modemið rætt uppset til 3G netíð.



Opna kagaran t.d Internet Explorer ella Chrome og skriva *192.168.1.1*

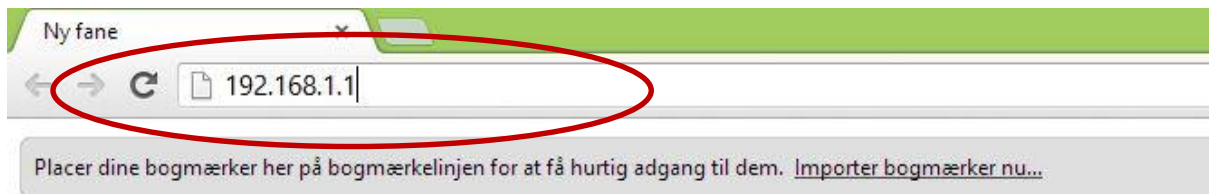

Skriva *admin* í **User name** og **Password** og trýst á **Login**

A screenshot of a login form. The form has three input fields: "User name:" with the value "admin" circled in red, "Password:" with a masked password "....." and a blue question mark icon, and "Language:" with a dropdown menu showing "English". Below the fields is a yellow warning triangle icon and the text "Enter your user name and password.". At the bottom are two buttons: "Login" (circled in red) and "Cancel".

Trýst á **Home** og síðani **Quick Setup**

Innset **PIN** kotuna til simkortið og trýst á **Next**

The screenshot shows the Huawei Quick Setup wizard. The 'Home' menu item is circled in red. The wizard progress bar shows 'PIN' as the current step, followed by 'Internet', 'Wi-Fi', 'Wi-Fi Security', and 'OK'. The 'PIN' step is highlighted in blue. Below the progress bar, the text reads: 'This wizard helps you configure the gateway.' The configuration details are as follows:

USIM card status:	PIN locked
PIN verification:	Enable
PIN:	<input type="text"/>
Remaining attempts:	2

A 'Next >' button is located at the bottom right of the configuration area.

Valfrítt: Seta flugu bein í **Enable**, so tær ikk nýtist at skriva PIN kotuna inn hvørja ferð tú tendrar modemið. Trýst á **Next**.

The screenshot shows the Huawei Quick Setup wizard. The 'Home' menu item is circled in red. The wizard progress bar shows 'PIN' as the current step, followed by 'Internet', 'Wi-Fi', 'Wi-Fi Security', and 'OK'. The 'PIN' step is highlighted in blue. Below the progress bar, the text reads: 'This wizard helps you configure the gateway.' The configuration details are as follows:

USIM card status:	USIM card normal
Remember my PIN:	<input type="checkbox"/> Enable

A 'Next >' button is located at the bottom right of the configuration area, also circled in red.

Trýst á Next

Overview

Product Information

Quick Setup

Update

Quick Setup

PIN >> **Internet** >> Wi-Fi >> Wi-Fi Security >> OK

Set Internet connection parameters.

Network mode: Auto

Connection mode: Always on

< Back **Next >**

Vel **DENMARK** og innset eitt sjálfvalt tráðleyst navn í **SSID**. Týst á **Next**.

Wi-Fi: Enable

Country/Region: DENMARK

Mode: 802.11b/g/n

Channel: Auto

SSID: ForovaTele1005 * (1-32 ASCII characters)

Hide SSID broadcast: Enable

< Back **Next >**

Innset eitt sjálvvalt tráðleyst loyniorð í **WPA-PSK**. Loyniorðið skal í minsta lagi vera 8 tekin. Trýst á **Next**.

After setting the parameters, remember the SSID and password for accessing the network.

Security:	WPA-PSK & WPA2-PSK ▼
Show password:	<input type="checkbox"/> Enable
WPA-PSK:* (8–63 ASCII characters or 8–64 hexadecimal characters)
WPA encryption:	TKIP+AES ▼

[< Back](#) [Next >](#)

Trýst á **Submit**.

Quick Setup	PIN >> Internet >> Wi-Fi >> Wi-Fi Security >> OK
Update	

Make sure that the following settings are correct. Click **Submit** for the settings to take effect.

Network mode:	Auto
Connection mode:	Always on
Wi-Fi:	Enabled
Mode:	802.11b/g/n
Country/Region:	DENMARK
Channel:	Auto
SSID:	ForoyaTele1005
Hide SSID broadcast:	Disable
Security:	WPA-PSK & WPA2-PSK
WPA-PSK:	123456789
WPA encryption:	TKIP+AES

[< Back](#) [Submit](#)

Bíða til modemið er endurbyrjað.



Trýst á **Internet**.



Trýst á **APN Management**.



Trýst á **Add**

APN Profile

Profile Name	APN	User Name	Password	AUTH	Operation
auto			*****		Delete Edit

[Add](#)

Skriva FTsjonet í Profile name og internet í APN. Trýst á Submit.

APN Profile

Profile Name	APN	User Name	Password	AUTH	Operation
auto			*****		Delete Edit
---	---	---	---	---	---

Settings

Profile name:

APN:

User name:

Password:

Authentication:

Vel Ftsjonet í Profile og trýst á Submit.

Network Connection

APN Management

PIN Management

Internet MTU

Network Connection

APN settings vary between service providers. If the current APN does not match the service provider, Internet services may be unavailable.

Note: Contact your service provider before configuring the APN.

Connection

Status: **Connection failed with error code 289**

Network mode:

Connection mode:

Profile:

PDP type:

Data roaming: Enable

Tá ið tað stendur **Connected**, er modemið klárt at brúka.

Connection

Status: Connected
