


Vegleiðing

Billion BIPAC 5200N RC


Set móttaldið til telduna og ADSL-linjuna.

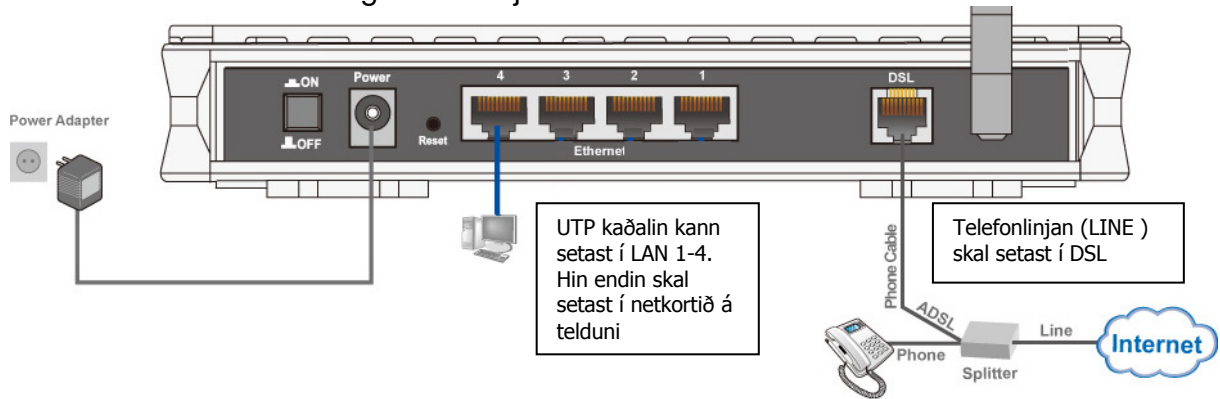

Tendra Internet Explorer (ella annan kagara) og skriva *192.168.1.254* í adressuteigin.



Skriva *admin* í teigin Username/Brugernavn og *admin* í teigin Password/Adgangskode og trýst á OK

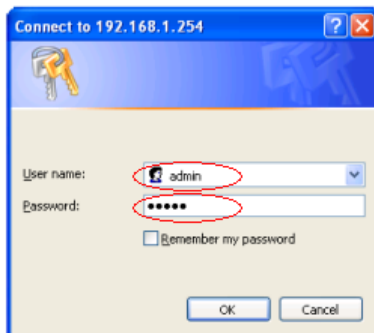

Vegleiðing

Billion BIPAC 5200N RC

Trýst á "Interface Setup"

The screenshot shows the web interface of a Billion BIPAC 5200N RC ADSL Modem/Router. The page is titled "Interface Setup" and is part of the "Advanced Setup" section. The interface is divided into several sections: "QoS", "Encapsulation", "PPPoE/PPPoA", "Connection Setting", and "IP Address".

Numbered callouts indicate the following steps:

1. Vel "PPPoA/PPPoE" (Select "PPPoA/PPPoE" under the ISP section).
2. Innset "1" (Set VPI to 1).
3. Innset "47" (Set VCI to 47).
4. Vel "UBR" (Select "UBR" for ATM QoS).
5. Innset "0" (Set PCR, SCR, and MBS to 0).
6. Vel "PPPoA VC-Mux" (Select "PPPoA VC-Mux" for Encapsulation).
7. Skriva síðani Username og Password (hetta stendur á ordraváttanini sum tú fekk sendandi frá Føroya Tele, tá tú stovnaði breiðbandið). (Enter Username and Password in the fields provided).
8. Trýst á "Save" (Click the "SAVE" button at the bottom).

FØROYA TELE

Postsmoga 27
110 Tórshavn
Tel 30 30 30
ft@ft.fo

www.ft.fo

Vegleiðing

Billion BIPAC 5200N RC

Trýst á Wireless

ADSL Modem/Router

Interface | Quick Start | **Interface Setup** | Advanced Setup | Access Management | Maintenance | Status | Help

Internet | LAN | **Wireless**

Access Point Settings

Access Point: Activated Deactivated

Channel: Auto Current Channel: 11

Beacon Interval(ms): 100 (range: 20-1000)

RTS/CTS Threshold: 2347 (range: 1500-2347)

Fragmentation Threshold(bytes): 2348 (range: 256-2348, even numbers only)

DTIM(ms): 3 (range: 1-255)

Wireless Mode: 802.11b+g+n

11n Settings

Channel Bandwidth: 20/40 MHz

Extension Channel: above the control channel

Guard Interval: AUTO

MCS: AUTO

Multiple SSIDs Settings

SSID Index: 1

Broadcast SSID: Yes No

Use WPS: Yes No

SSID: Tráðleys NAVN

Authentication Type: WPA-PSK/WPA2-PSK

WPA-PSK

Encryption: TKIP/AES

Pre-Shared Key: Loyniorð (8-63 ASCII characters or 64 hexadecimal characters)

Wireless MAC Address Filter

Active: Activated Deactivated

Action: Deny Association the follow Wireless LAN station(s) associat

Mac Address #1: 00:00:00:00:00:00

Mac Address #2: 00:00:00:00:00:00

Mac Address #3: 00:00:00:00:00:00

Mac Address #4: 00:00:00:00:00:00

Mac Address #5: 00:00:00:00:00:00

Mac Address #6: 00:00:00:00:00:00

Mac Address #7: 00:00:00:00:00:00

Mac Address #8: 00:00:00:00:00:00

6. Trýst á "Save"

SAVE CANCEL

1. Vel "Auto"

2. Gev tráðleysa sambandinum eitt sjálfvalt navn.

3. Vel "WPA-PSK/WPA2-PSK"

4. Vel "TKIP/AES"

5. Skriva eitt sjálfvalt loyniorð í "Pre-Shared Key". Loyniorðið skal í minsta lagi vera 8 stavar.

Nú er beinarin uppsettur og klárur at taka í nýtslu.

FØROYA TELE

Postsmoga 27
110 Tórshavn
Tel 30 30 30
ft@ft.fo

www.ft.fo