



# Vegleiðing til Billion BiPAC 5102G


Set móttaldið til **telduna** og **ADSL-linjuna**.

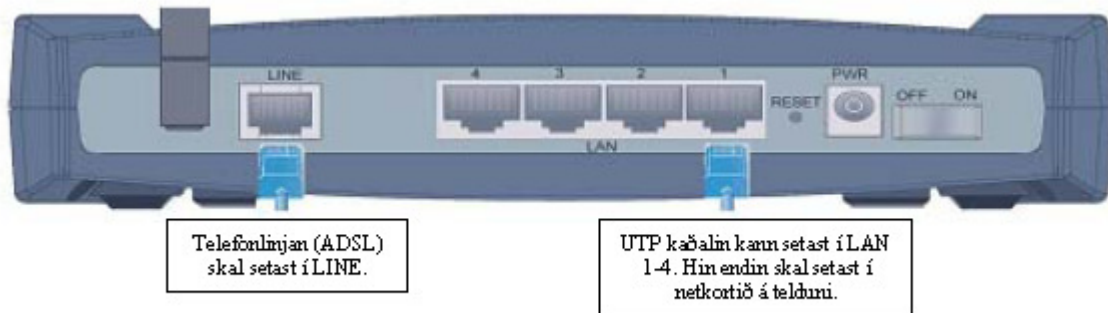

Set streymstikkið í **PWR** og tendra (**ON**)

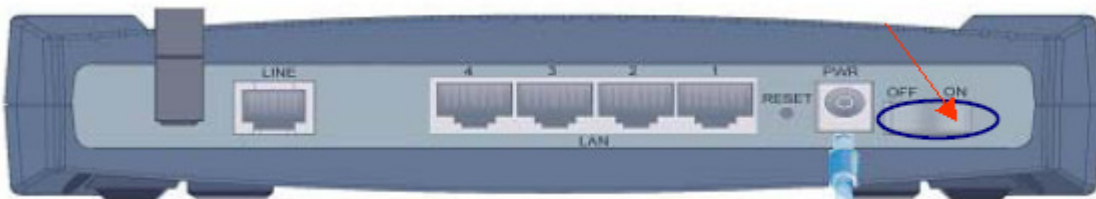

Tryggja tær, at **PWR, SYS, WLAN, ADSL** og **LAN-portrið** (nr. 1, 2, 3 ella 4) við UTP-kaðalinum lýsa.

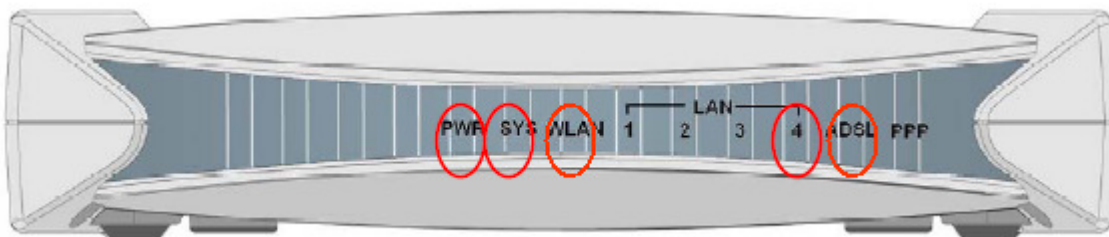

Um alt lýsir, sum tað skal, kann uppsetingin halda fram

Starta **Internet Explorer** (ella annan kaga), og skriva


**http://192.168.1.254** í adressuteigin



Skriva **admin** í teigin: User name/Brugernavn

og **admin** í teigin Password/Adgangskode

og klikk á **OK**

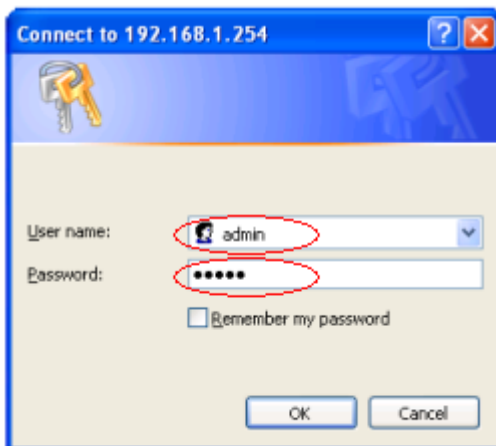

Nú er komið inn í mótaldið/routaran


## Vel Quick Start

The screenshot shows the web interface of a BILLION ADSL Modem Router. The browser address bar shows `http://192.168.1.254/`. The main navigation menu includes 'Quick Start', 'Interface Setup', 'Advanced Setup', 'Access Management', 'Maintenance', 'Status', and 'Help'. The 'Quick Start' menu item is circled in red. Below the navigation menu, there are sub-menus for 'Device Info', 'System Log', and 'Statistics'. The main content area is divided into sections: 'Device Information' (Firmware Version: 2.7.0.11(ZUBO.B1)3.2.5, MAC Address: 0004 ed53 3006), 'LAN' (IP Address: 192.168.1.254, Subnet Mask: 255.255.255.0, DHCP Server: Enabled), 'WAN' (Virtual Circuit: PVC0, Status: Not Connected, Connection Type: PPPoE, IP Address: 0.0.0.0, Subnet Mask: 0.0.0.0, Default Gateway: 0.0.0.0, DNS Server: 0.0.0.0), and 'ADSL' (ADSL Firmware Ver: FwVer:3.2.2.5\_A\_T03094 HwVer:T14.F7\_0.0, Line State: Down).


## Vel síðani á RUN WIZARD

The screenshot shows the 'Quick Start' page of the BILLION ADSL Modem Router web interface. The browser address bar shows `http://192.168.1.254/`. The main navigation menu includes 'Quick Start', 'Interface Setup', 'Advanced Setup', 'Access Management', 'Maintenance', 'Status', and 'Help'. The 'Quick Start' menu item is highlighted. Below the navigation menu, there is a 'Quick Start' section with a large text block: "This ADSL Router is ideal for home networking and small business networking. The 'Quick Start' wizard will guide you to configure the ADSL router to connect to your ISP (Internet Service Provider). The router's easy Quick Start will allow you to have Internet access within minutes. Please follow the 'Quick Start' wizard step by step to configure the ADSL Router." At the bottom of the page, there is a 'RUN WIZARD' button circled in red.


Nú kemur eitt nýtt vindeyga upp. Vel **NEXT**

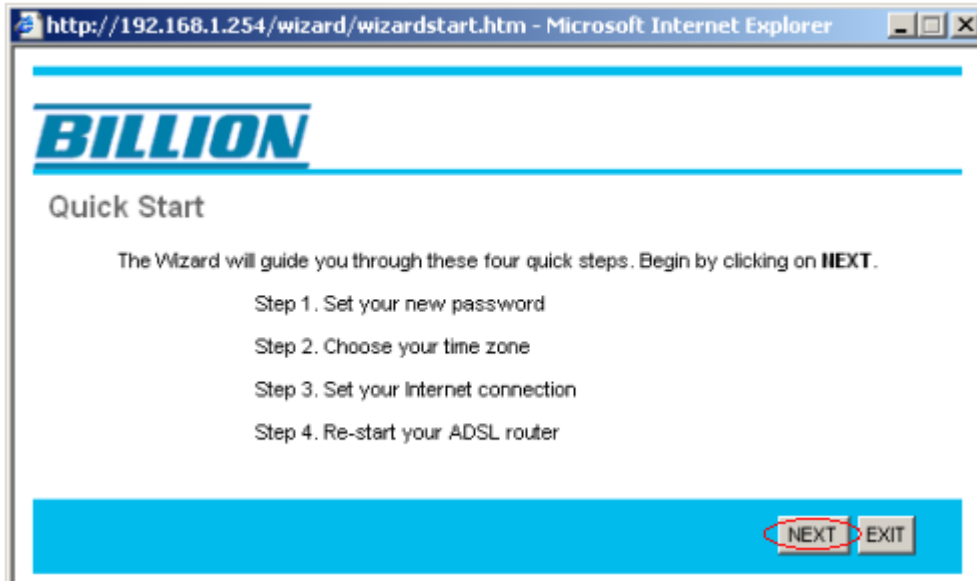


Nú ber til at broyta uppruna loyniorðið í mótdalnim, so eingin annar kann fara inn at broyta. Um uppruna loyniorðið skal varðveitast, skriva **admin** í báðar teigarnar og vel á **NEXT**.

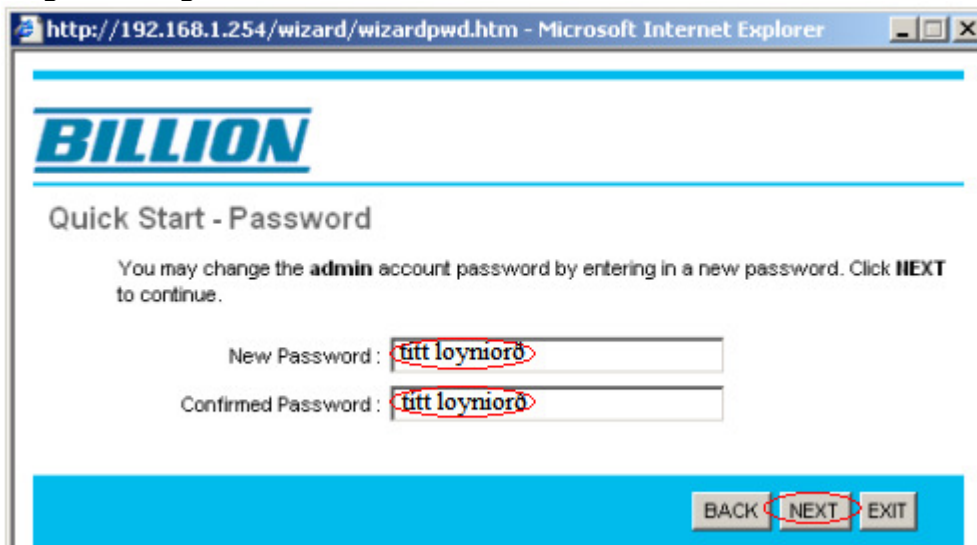

Vel **GMT** í listanum og síðani **NEXT**

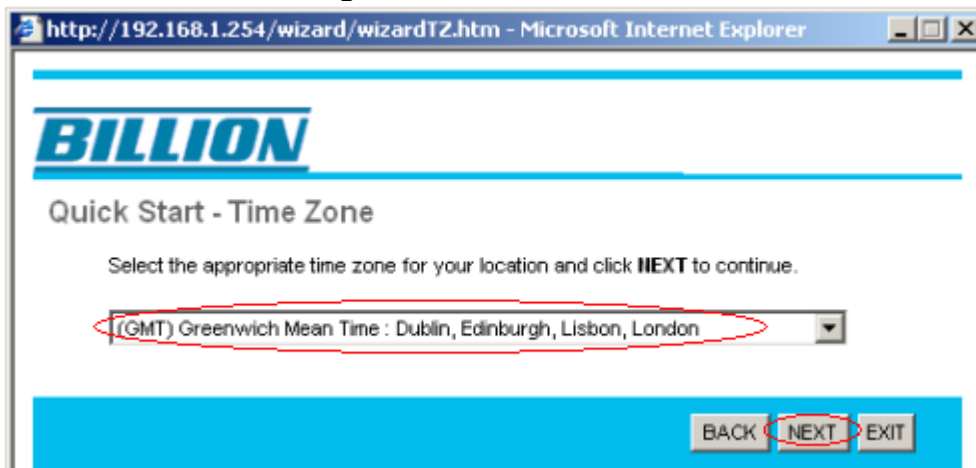

Vel síðani **PPPoE/PPPoA** og síðani **NEXT**

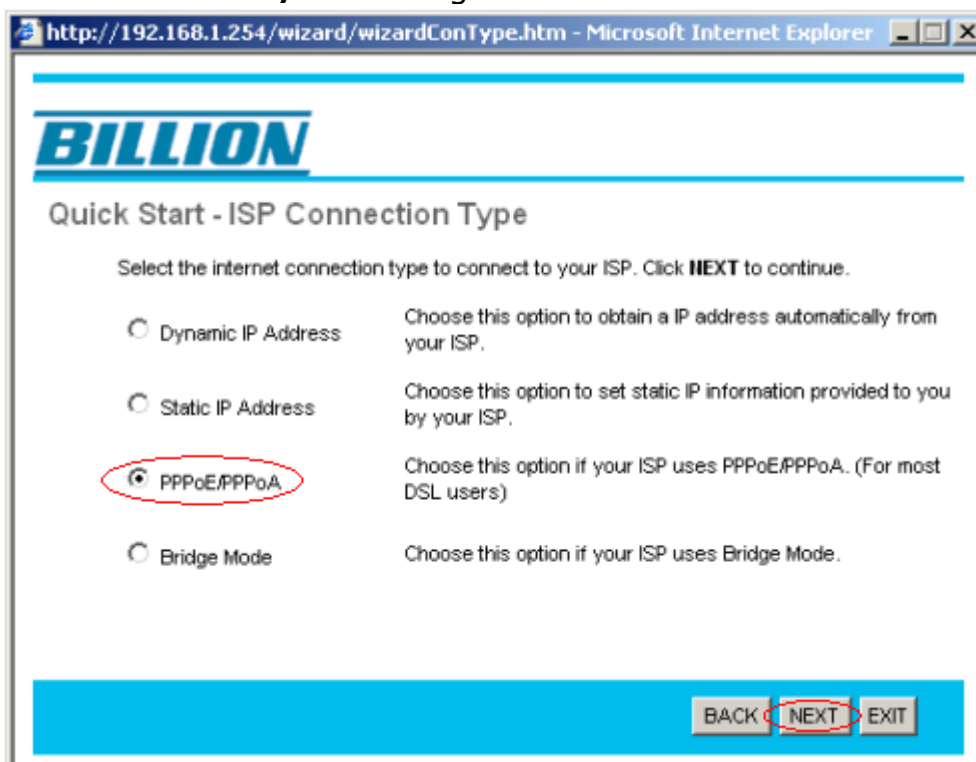

Skriva brúkaranavn og loyniorð, sum Føroya Tele hevur útflyggjað, í ávikavist **Username** og **Password**

set VPI til at vera: **1**

set VCI til at vera: **47**

set Connection Type: **PPPoA VC-Mux**

## Vel síðani **Next**

http://192.168.1.254/wizard/wizardPPP.htm - Microsoft Internet Explorer

# BILLION

## Quick Start - PPPoE/PPPoA

Enter the PPPoE/PPPoA information provided to you by your ISP. Click **NEXT** to continue.

Username: ds114xxxxx

Password: \*\*\*\*\*

VPI: 1 (0-255)

VCI: 47 (1-65535)

Connection Type: PPPoA VC-Mux

BACK NEXT EXIT

Nú er uppsetingin næstan liðug.

Vel **NEXT** fyri at goyma og fara víðari ella **BACK**, um okkurt er skeivt ella skal broytast

http://192.168.1.254/wizard/wizardcomp.htm - Microsoft Internet Explorer


# BILLION

## Quick Start Complete !!

The Setup Wizard has completed. Click on **BACK** to modify changes or mistakes. Click **NEXT** to save the current settings.


BACK NEXT EXIT

Nú er ADSL-uppsetingin liðug. Vel á **CLOSE**

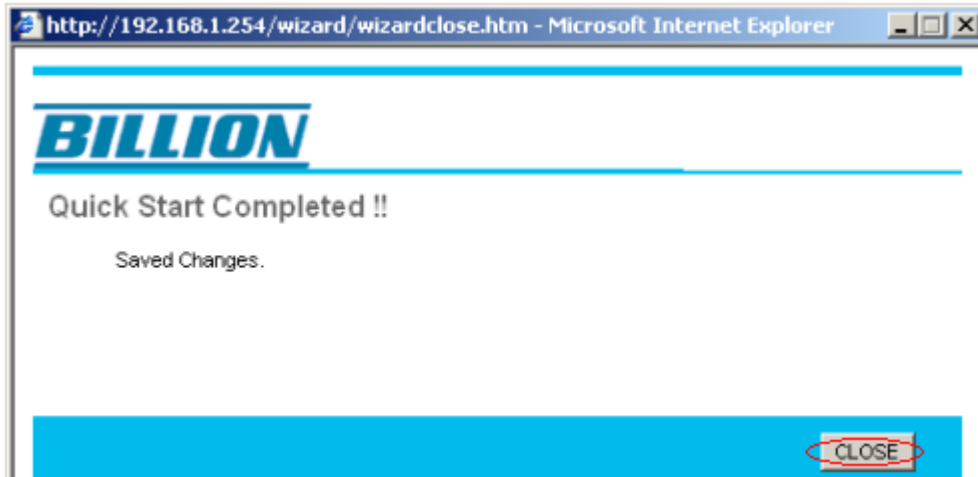

## Uppseting av tráðleysum sambandi

Vel **Interface Setup** og síðani **Wireless**

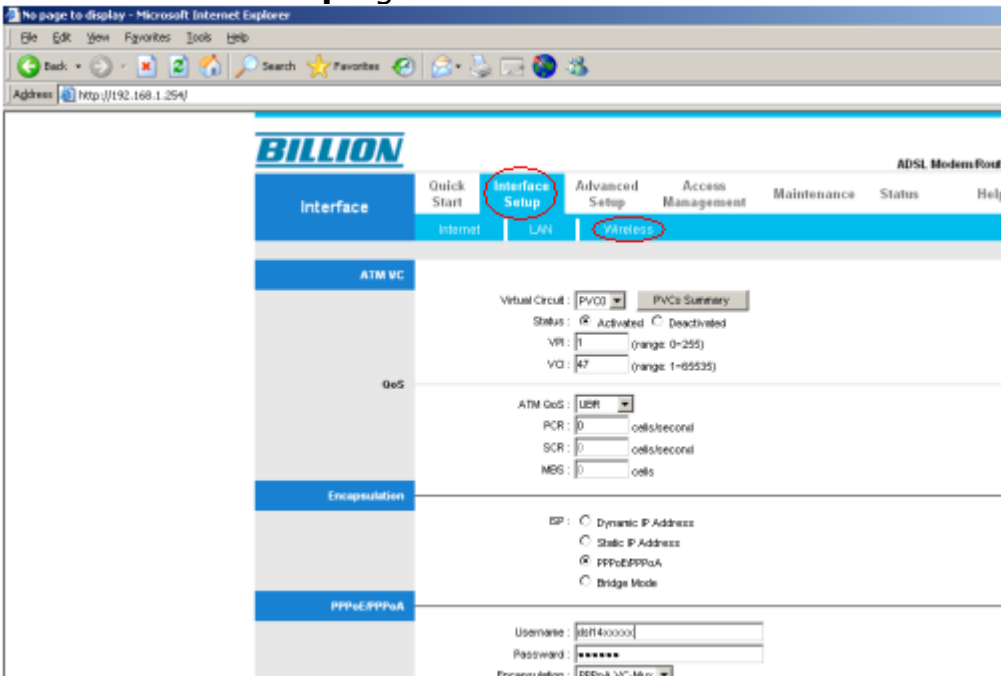

Gev trádleysa sambandinum eitt navn í **SSID**, í døminum hava vit brúkt **inetsupport** (minst til navnið, sum skal brúkast seinni í uppsetingini).

Vel **yes** í Broadcast SSID

Vel **WPA-PSK** í **Authentication Type** og **TKIP** í **Encryption**.

Skriva eina kotu í **Pre-Shared Key**. Kotan skal í minsta lagi vera 8 stavir og í mesta lagi 64. *Minst til hesa kotu, tí hon skal nýttast í teimum teldum, sum skulu knýttast í trádleysa sambandið.*

(G.G. Nýt eina aðra kotu enn hana, sum er í døminum.)


Vel SAVE

The screenshot shows the configuration page for a BILLION ADSL Modem Router. The browser is Microsoft Internet Explorer, and the address bar shows http://192.168.1.254/. The page has a navigation menu with options: Quick Start, Interface Setup, Advanced Setup, Access Management, Maintenance, Status, and Help. The 'Interface Setup' tab is active, and the 'Wireless' sub-tab is selected. The 'Wireless LAN' section includes the following settings: Access Point (radio buttons for 'Activated' and 'Deactivated'), SSID (text input field containing 'inetsupport'), Broadcast SSID (radio buttons for 'Yes' and 'No'), Channel ID (dropdown menu showing 'Channel01 2412MHz'), and Authentication Type (dropdown menu showing 'WPA-PSK'). The 'WPA-PSK' section includes Encryption (dropdown menu showing 'TKIP') and Pre-Shared Key (text input field containing 'inetsupport'). The 'Advanced Setting' section includes Beacon Interval (100), RTS/CTS Threshold (2347), Fragmentation Threshold (2346), and DTIM (1). The 'Wireless MAC Address Filter' section includes Active (radio buttons for 'Activated' and 'Deactivated') and Action (dropdown menu showing 'Allow Association'). Below the Action dropdown is a list of Mac Address fields (Mac Address #1 through #8), all containing '00:00:00:00:00:00'. At the bottom of the page, there are 'SAVE' and 'CANCEL' buttons, with the 'SAVE' button highlighted by a red circle.




# Uppseting av tráðleysum sambandi á telduni (Windows Xp).


Far inn í **Kontrolpanel**

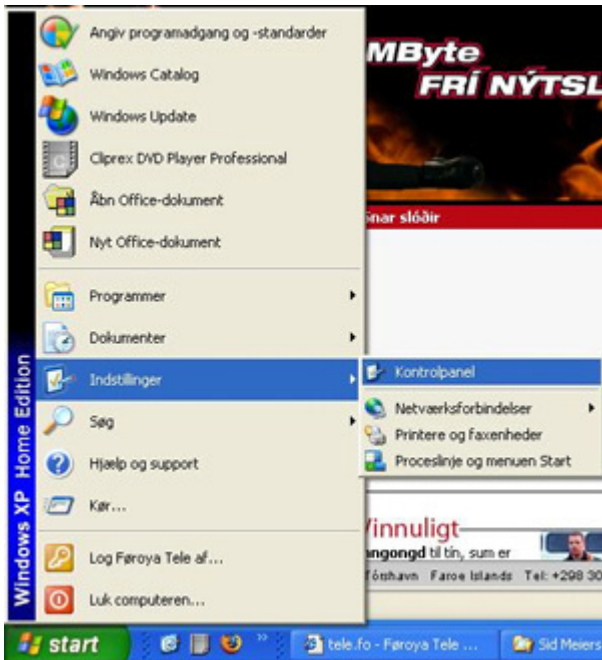


Síðani **Netværkforbindelser**.

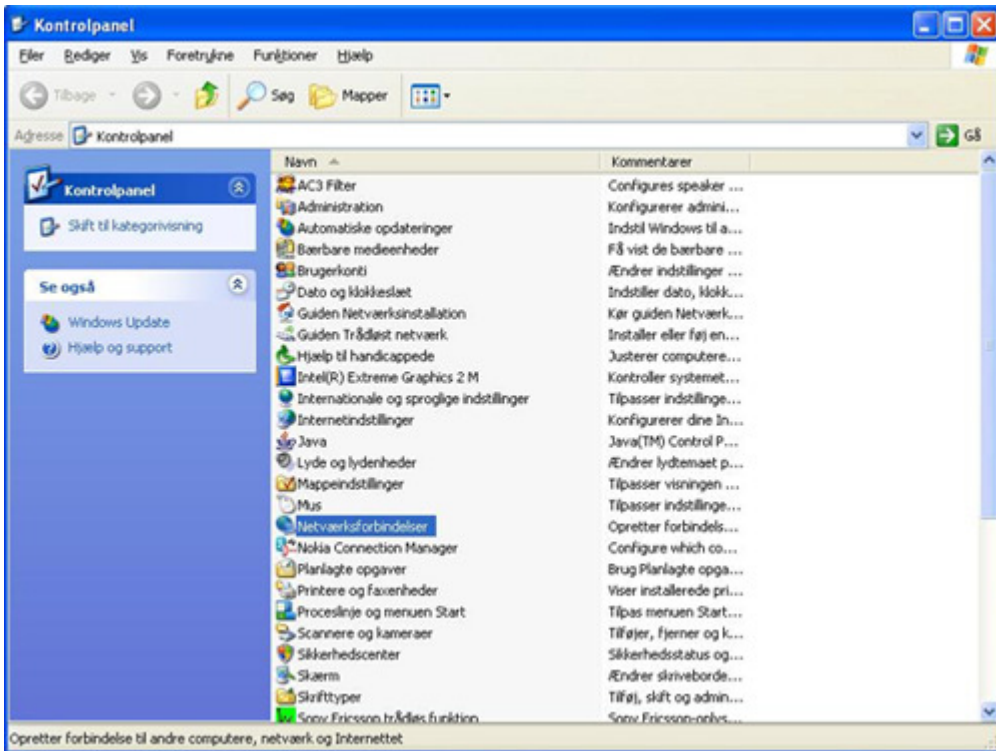


Um síðan ikki líkist hesi omanfyri vel **Skift til klassisk vísing**.

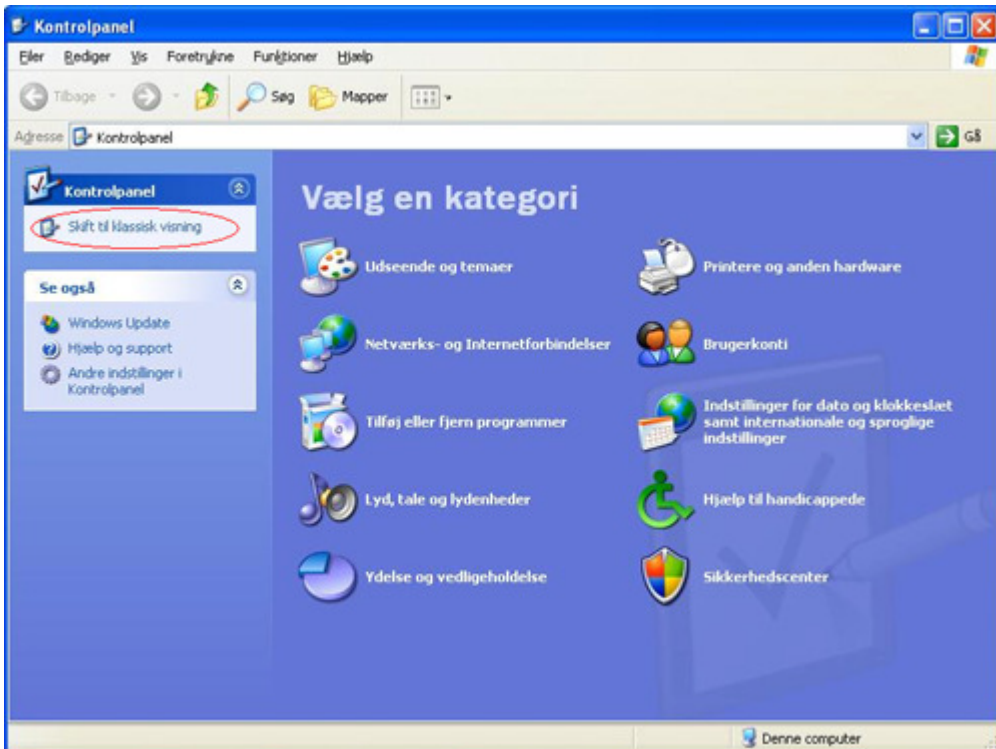


Høgraklikk á **Tráðlæs netværksforbindelse** og vel **Vis tráðlæse netværk, der er tilgængelige**.

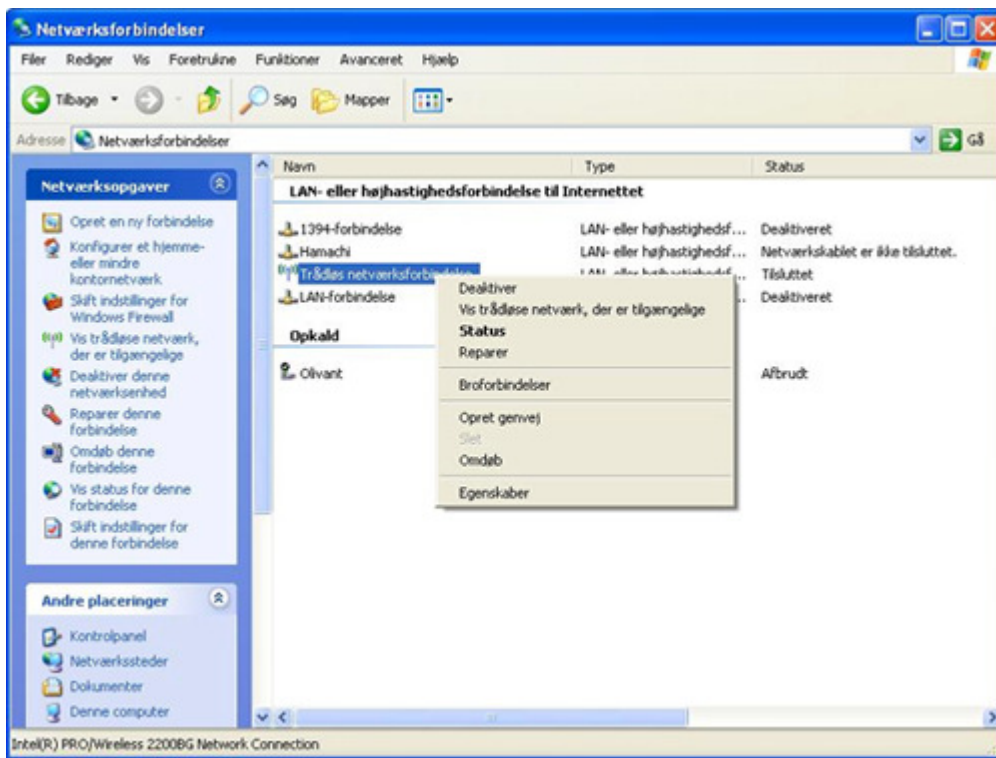

Vel tráðleysa sambandið (navnið, sum varð skrivað í **SSID-teigin** í beinaranum) og vel **Opret forbindelse** (í okkara dømi eitur tráðleysa netið Inet)

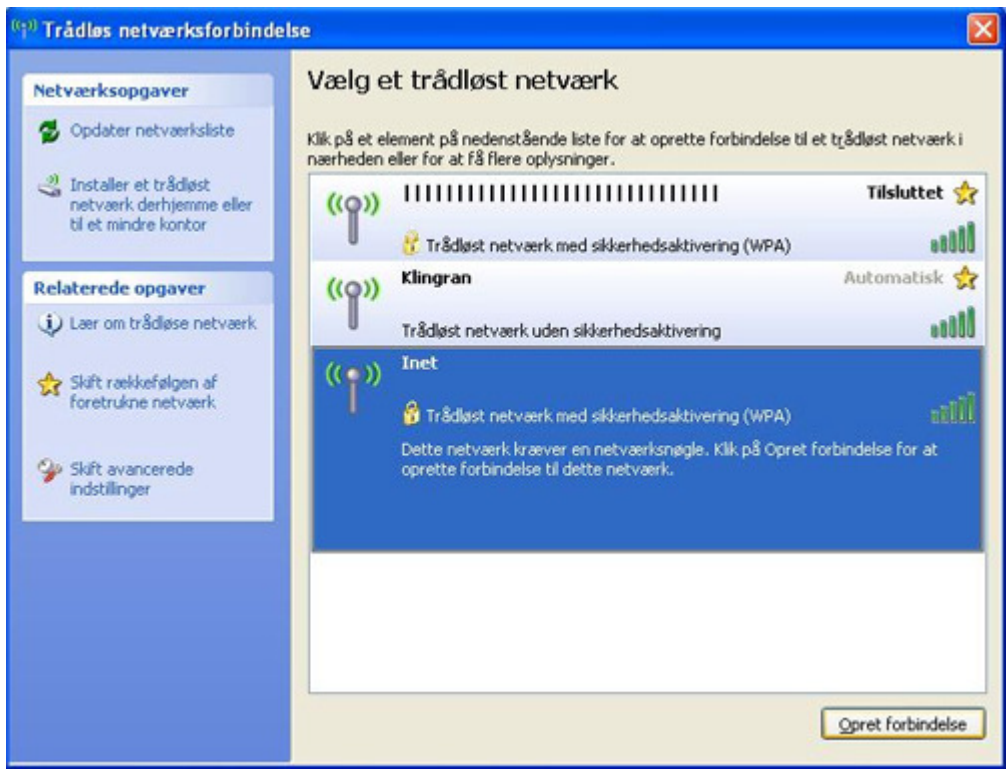

Skriv loyniorðið (**Pre-shared Key**) í **Netværksnøgle** og **Bekræft**.

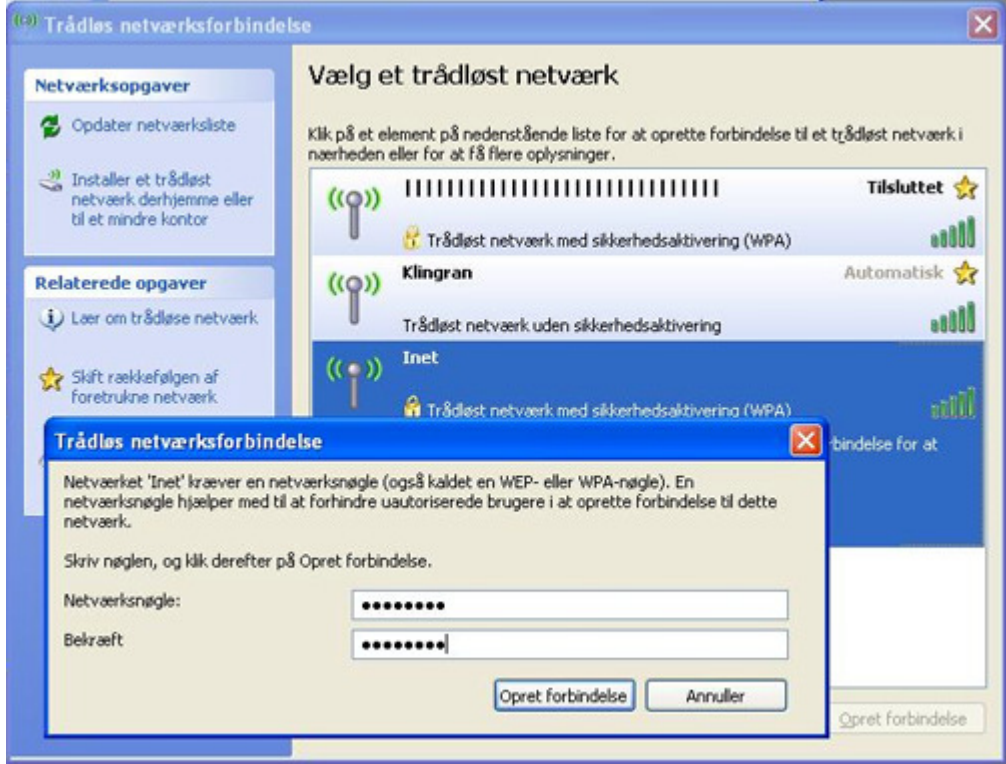

**Nú er klárt at brúka breiðbandið**